




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : B60R 25/04, E05B 49/00, E05F 15/20, F02N 11/08		A1	(11) International Publication Number: <b>WO 99/64274</b> (43) International Publication Date: 16 December 1999 (16.12.99)
(21) International Application Number: PCT/US99/12871			(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(22) International Filing Date: 8 June 1999 (08.06.99)			
(30) Priority Data: 09/097,084	12 June 1998 (12.06.98)	US	
(71) Applicant: LEAR AUTOMOTIVE DEARBORN, INC. [US/US]; 5200 Auto Club Drive, Dearborn, MI 48126 (US).			
(72) Inventors: SWAN, James, L.; 38910 Northfield, Livonia, MI 48150-3331 (US). BERELS, David, J.; 7275 Edwards Road, Belleville, MI 48111 (US). NG, Jerome; 1707 Broadview Lane #115, Ann Arbor, MI 48105 (US).			
(74) Agents: QUINN, Christopher, W. et al.; Brooks & Kushman, 22nd floor, 1000 Town Center, Southfield, MI 48075 (US).			

(54) Title: INTEGRATED VEHICLE REMOTE ENGINE IGNITION SYSTEM

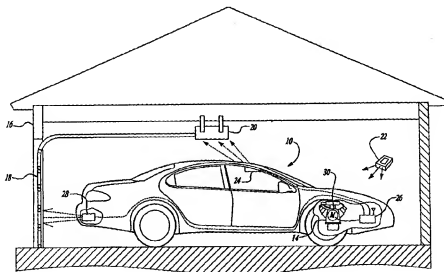

## (57) Abstract

A remotely controlled electrical accessory system starts an engine of a vehicle and actuates a garage door opener attached to a garage door. The system includes a first transmitter for producing an engine ignition signal and a second transmitter for producing a garage door opener actuation signal. A receiver starts the engine of the vehicle and energizes the second transmitter to produce the garage door opener actuation signal in response to the engine ignition signal. In a preferred embodiment, the system includes a proximity sensor attached to the vehicle for producing a gating signal in response to a closed garage door. Preferably, the receiver starts the engine of the vehicle in response to the engine ignition signal and energizes the second transmitter to produce the garage door opener actuation signal in response to the engine ignition signal and the gating signal.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## INTEGRATED VEHICLE REMOTE ENGINE IGNITION SYSTEM

### BACKGROUND OF THE INVENTION

This invention relates to a remotely controlled engine ignition system.

5           Modern vehicles include a variety of electrical accessory systems such as remotely controlled engine ignition systems, universal transmitters, and object detection systems. Typically, object detection systems produce a visual and/or audible warning when an object enters an obstructed portion of a driver's rear view, referred to as a rear "blind spot". When a vehicle is driven in the forward gear, the  
10          warning usually indicates that another vehicle is following in a rear "blind spot". When the vehicle is driven in the reverse gear, the warning usually indicates that a child or object, such as a ball or other toy, has crossed the rearward path of the vehicle. To detect the presence of an object in a rear "blind spot", object detection systems typically include a plurality of proximity sensors located in the rear of the  
15          vehicle.

          Many modern vehicles further include a universal transmitter capable of "learning" and reproducing one or more radio frequency signals. Thus, a single universal transmitter can replace several separate transmitters used to operate radio frequency signal controlled devices such as garage door openers, security gate  
20          openers, home security systems, and home lighting systems. Typically, the universal transmitter is mounted to the driver's sun visor or the headliner of the vehicle. In this manner, the universal transmitter provides a convenient way to consolidate the functions of several hand-held transmitters into one vehicle mounted device.

Many modern vehicles also include a remotely controlled engine ignition system. A remotely controlled engine ignition system enables the driver to start the engine of the vehicle from a distant location. Although these systems increase driver convenience, remotely controlled engine ignition systems present safety concerns. The foremost safety concern is carbon monoxide poisoning which can occur when the vehicle is remotely started in a closed garage.

### **SUMMARY OF THE INVENTION**

In a disclosed embodiment of this invention, a remotely controlled electrical accessory system is provided for starting an engine of a vehicle and actuating a garage door opener attached to a garage door. The remotely controlled electrical accessory system includes a first transmitter for producing an engine ignition signal and a second transmitter for producing a garage door opener actuation signal. A receiver starts the engine of the vehicle and energizes the second transmitter to produce the garage door opener actuation signal upon receipt of the engine ignition signal.

In a preferred embodiment of this invention, the remotely controlled electrical accessory system includes a proximity sensor attached to the vehicle for producing a gating signal in response to a closed garage door. Preferably, the receiver starts the engine of the vehicle in response to the engine ignition signal and energizes the second transmitter to produce the garage door opener actuation signal in response to both the engine ignition signal and the gating signal.

These and other features of the present invention will be best understood from the following specification and drawings, the following of which is a brief description.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

5                   Figure 1 is a fragmentary perspective view of a vehicle including a remotely controlled electrical accessory system in accordance with the present invention.

                  Figure 2 is an electrical schematic diagram of the remotely controlled electrical accessory system in accordance with the present invention.

10                  Figure 3 is a flow chart of a first method for remotely starting an engine of a vehicle and actuating a garage door opener in accordance with the present invention.

                  Figure 4 is a flow chart of a second method for remotely starting the engine of the vehicle and actuating the garage door opener in accordance with the  
15 present invention.

                  Figure 5 is a flow chart of a third method for remotely starting the engine of the vehicle and actuating the garage door opener with accordance with the present invention.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

20                  Figure 1 is a fragmentary perspective view of a vehicle 10 including a remotely controlled electrical accessory system 12 in accordance with the present

invention. The vehicle 10, having an engine 14, is shown parked in a closed garage 16. The garage 16 has a garage door 18 which is opened and closed by a garage door opener 20. The garage door opener 20 is of a conventional design and, thus, controlled by a unique signal transmitted from a wireless transmitter. The remotely controlled electrical accessory system 12 includes a first transmitter 22, a second transmitter 24, a receiver 26, a proximity sensor 28, and an engine starter motor 30. Preferably, the first transmitter 22 is of a conventional design including a portable housing and circuitry. This type of hand-held transmitter is sometimes referred to as a key fob. Typically, the second transmitter 24 is mounted to the driver's sun visor or to the headliner of the vehicle within the reach of the driver. In one embodiment of the present invention, the proximity sensor 28 is mounted in the rear of the vehicle. In accordance with the present invention, one of ordinary skill in the art will recognize that any type of sensor capable of detecting an object within a predetermined distance from the sensor may be employed as the proximity sensor 28.

Figure 2 is an electrical schematic diagram of the remotely controlled electrical accessory system 12 in accordance with the present invention. The first radio frequency transmitter 22 produces a first radio frequency signal hereinafter referred to as the engine ignition signal. The first transmitter 22 includes an input switch 30 and a transmitter circuit 32 which broadcasts the unique engine ignition signal when the input switch 30 is depressed.

The second radio frequency transmitter 24 produces a second radio frequency signal hereinafter referred to as the garage door opener actuation signal to energize an actuator to move an object. In a preferred embodiment of the present invention, the object is the garage door 18 and, accordingly, the actuator includes means for opening the garage door 18. Thus, the garage door opener actuation

signal energizes the garage door opener 20 to move the garage door 18. The second transmitter 24 includes an input switch 34 and a transmitter circuit 36 which broadcasts the unique garage door opener actuation signal when the input switch 34 is depressed or when the second transmitter 24 is energized by the receiver 26.

5 Unlike the first transmitter 22, the second transmitter 24 preferably includes a memory circuit 38 for receiving, copying, and reproducing one or more different radio frequency signals. In this manner, the second transmitter 24 can "learn" one or more radio signals and eliminate the need to carry or store several separate transmitters in the vehicle to operate a garage door opener, security gate opener,

10 home security system, and/or home lighting system. Accordingly, the second transmitter 24 is sometimes referred to in the art as a universal or trainable transmitter.

The receiver 26 includes an antenna 40 for capturing local airborne radio frequency signals. The receiver 26 actuates a vehicle accessory and energizes

15 the second radio frequency transmitter 24 to produce the garage door opener actuation signal upon receipt of the engine ignition signal. Preferably, the receiver 26 actuates the engine starter motor 30 as the vehicle accessory. Upon receipt of the engine ignition signal, the receiver 26 actuates the engine starter motor 30 by supplying power from an electrical power supply 42 through the receiver 26 to the

20 engine starter motor 30 as shown in Figure 2 or by switching power from the power supply 42 to the engine starter motor 30 through a relay or other components.

In a preferred embodiment of the present invention, the remotely controlled electrical accessory system 12 includes a proximity sensor 28 for producing a gating signal in response to the position of the garage door 18 for

25 controlling the second radio frequency transmitter 24 to produce the garage door

opener actuation signal. That is, the proximity sensor will "sense" an obstruction and send a signal when the garage door is closed.

In one preferred embodiment of the present invention, the receiver 26 actuates the engine motor starter 30 in response to the engine ignition signal and energizes the second radio frequency transmitter 24 to produce the garage door opener actuation signal in response to both the engine ignition signal and the gating signal. In a second preferred embodiment of the present invention, the receiver 26 actuates the engine motor starter 30 and energizes the second radio frequency transmitter 24 to produce the garage door opener actuation signal in response to the engine ignition signal and reenergizes the second radio frequency transmitter 24 to reproduce the garage door opener actuation signal in response to the gating signal.

In a preferred embodiment of the present invention, the remotely controlled electrical accessory system 12 further includes a shut-off switch 44 for disabling the receiver 26 from energizing the second radio frequency transmitter 24. In this manner, actuation of the garage door opener 20 through the receiver 26 can be disabled if the vehicle 10 has been parked outside the garage 16.

In accordance with the present invention, the garage door opener 20 includes means for opening the garage door 18. Conventionally, the garage door opener 20 includes a motor 46 to open and close the garage door 18 upon receipt of the unique garage door opener actuation signal. One of ordinary skill in the art will recognize that the garage door opener 20 may include an antenna 48 to capture local airborne frequency signals including the unique garage door opener actuation signal broadcasted by the second radio frequency transmitter 24.

In accordance with the present invention, three methods for starting an engine of a vehicle and actuating a garage door opener are disclosed. As will be



appreciated by one of ordinary skill in the art, the order of the steps is not important to achieving the objects of the present invention. As will also be recognized, the methods may be performed in software, hardware, or a combination of both as in a preferred embodiment of the invention.

5                   Figure 3 is a flow chart of a first method 50 for remotely starting an engine of a vehicle and actuating a garage door opener in accordance with the present invention. The steps of the first method 50 include: transmitting an engine ignition signal, as represented by block 52; starting the engine of the vehicle in response to the engine ignition signal, as represented by block 54; transmitting a garage door  
10                   actuation signal in response to the engine ignition signal, as represented by block 56; and opening the garage door in response to the garage door actuation signal, as represented by block 58. Each of these steps can be performed by the remotely controlled electrical accessory system 12, as described above, upon activation of the system 12.

15                   In this first method, which is not presently the preferred method, somehow of providing a unique signal to open the garage door is necessary. In known garage door openers, the same signal opens and closes the garage door, dependent on the position of the door. In this first method, the garage door opener would preferably be modified such as there is a unique open and unique closed  
20                   signal. Thus, in this method, the open signal is sent. If the garage door is open, no actuation occurs. On the other hand, should the garage door be closed, the unique open signal will open the door.

                  Figure 4 is a flow chart of a second method 60 for remotely starting the engine of the vehicle and actuating the garage door opener in accordance with the  
25                   present invention. The steps of the second method 60 include: transmitting an engine

ignition signal, as represented by block 62; starting the engine of the vehicle in response to the engine ignition signal, as represented by block 64; determining that the garage door is closed, as represented by block 66; transmitting a garage door actuation signal in response to the determination that the garage door is closed, as represented by block 68; and opening the garage door in response to the garage door actuation signal, as represented by block 70. If the garage door is not closed during step 66, then steps 68 and 70 are skipped. Each of these steps can be performed by the preferred embodiment of the remotely controlled electrical accessory system 12 including the proximity sensor 28, as described above, upon activation of the system 12.

Figure 5 is a flow chart of a third method 80 for remotely starting the engine of the vehicle and actuating the garage door opener with accordance with the present invention. The steps of the third method 80 include: transmitting an engine ignition signal, as represented by block 82; starting the engine of the vehicle in response to the engine ignition signal, as represented by block 84; determining that the garage door actuation function is on, as represented by block 86; transmitting a garage door actuation signal in response to the determination that the garage door actuation function is on, as represented by block 88; delaying for a predetermined amount of time (X seconds) to allow the garage door to move, as represented by block 90; and determining that the garage door is open, as represented by block 92. If the garage door actuation function is not on during step 86, then steps 88, 90, and 92 are skipped. If the garage door is not open during step 92, then the third method 80 proceeds back to step 88. Each of these steps can be performed by the preferred embodiment of the remotely controlled electrical accessory system 12 including the proximity sensor 28 and the shut-off switch 44, as described above, upon activation

by an operator. Most importantly, the third method 80 is particularly effective in handling a half-closed garage door condition. Conventional garage door openers operate with only one actuation signal. If the garage door is open, the garage door opener will close the garage door upon receipt of the next actuation signal. If the garage door is closed, the garage door opener will open the garage door upon receipt of the next actuation signal. Further, conventional garage door openers can be manipulated to stop the garage door at a half-closed position. If the garage door is half-closed, the transmission of the garage door opener actuation signal, as represented by step 88, will completely close the garage door. As a result, the garage door will be closed during step 92. Accordingly, the third method 80 will proceed back to step 88 and retransmit the garage door opener actuation signal to open the garage door. In this manner, the third method 80 is particularly effective in opening a half-closed garage door.

Preferred embodiments of this invention have been disclosed, however, a worker of ordinary skill in the art would recognize that certain modifications would come within the scope of this invention. For that reason, the following claims should be studied to determine the true scope and content of this invention.

**WHAT IS CLAIMED IS:**

1. A remotely controlled vehicle accessory system comprising:  
a radio frequency transmitter for producing a first radio  
frequency signal,  
5 a radio frequency transmitter for producing a second radio  
frequency signal to energize an actuator to move an object, and  
a receiver for actuating a vehicle accessory in response to said  
first radio frequency signal and for energizing said second radio frequency  
transmitter to produce said second radio frequency signal.
- 10 2. A vehicle accessory system as set forth in claim 1 including a  
sensor for producing a gating signal in response to the position of the object for  
producing said second radio frequency signal in response to said first radio frequency  
signal and said gating signal.
- 15 3. A vehicle accessory system as set forth in claim 1 including a  
sensor for producing a gating signal in response to the position of the object for  
controlling said second radio frequency transmitter to produce said second radio  
frequency signal in response to said first radio frequency signal and to reproduce said  
second radio frequency signal in response to said gating signal.

4. A vehicle accessory system as set forth in claim 1 including a shut-off switch for disabling said receiver from energizing said second radio frequency transmitter.

5. A vehicle accessory system as set forth in claim 1 wherein said first and second signals are produced by first and second transmitters, said first radio frequency transmitter consists of a portable housing and circuitry.

6. A vehicle accessory system as set forth in claim 5 wherein said second radio frequency transmitter includes a memory circuit for receiving and reproducing said second radio frequency signal.

7. A vehicle accessory system as set forth in claim 1 wherein the actuator includes means for opening a garage door.

8. A vehicle accessory system as set forth in claim 1 wherein said receiver actuates an engine starter motor as the vehicle accessory.

9. A vehicle accessory system as set forth in claim 1;  
wherein said first radio frequency signal comprises an engine ignition signal produced by a first transmitter,  
said second radio frequency signal comprises a garage door opener actuation signal produced by a second transmitter; and the system further comprises:

a proximity sensor attached to a vehicle for producing a gating signal in response to a garage door being in an obstructing position, and  
said receiver operative to start an engine of the vehicle in response to said engine ignition signal and for energizing said second transmitter to  
5 produce said garage door opener actuation signal in response to said engine ignition signal and said gating signal.


10. An accessory system as set forth in claim 9 wherein said receiver starts the engine of the vehicle and energizes said second transmitter to produce said garage door opener actuation signal in response to said engine ignition  
10 signal and reenergizes said second transmitter to reproduce said garage door opener actuation signal in response to said gating signal.

11. A method for remotely starting an engine of a vehicle and opening a garage door, the method comprising the steps of:  
transmitting an engine ignition signal,  
15 starting the engine of the vehicle in response to the engine ignition signal,  
transmitting a garage door actuation signal in response to the engine ignition signal, and  
opening the garage door in response to the garage door  
20 actuation signal.

12. A method as set forth in claim 11 wherein the step of opening the garage door consists of actuating a garage door opener attached to the garage door.

13. A method as set forth in claim 11 including the step of  
5 determining that the garage door is closed prior to the step of transmitting the garage door actuation signal.


14. A method as set forth in claim 13 wherein the step of determining that the garage door is closed consists of sensing that the garage door is in an obstructing position.

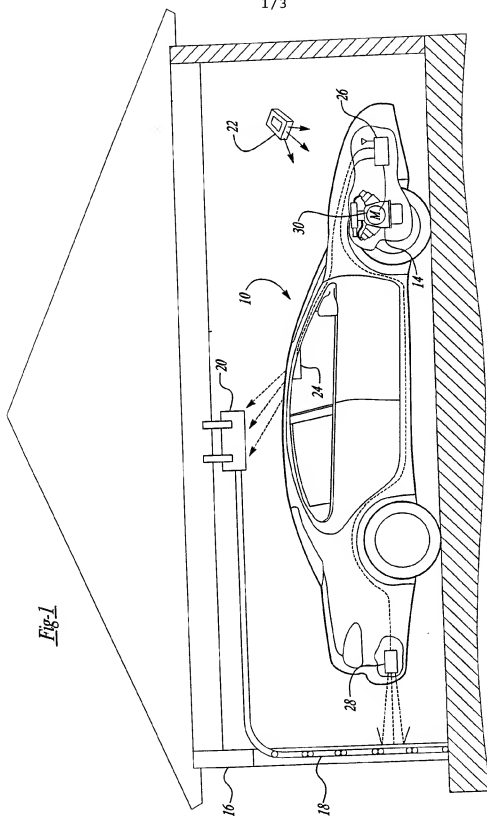





3 / 3

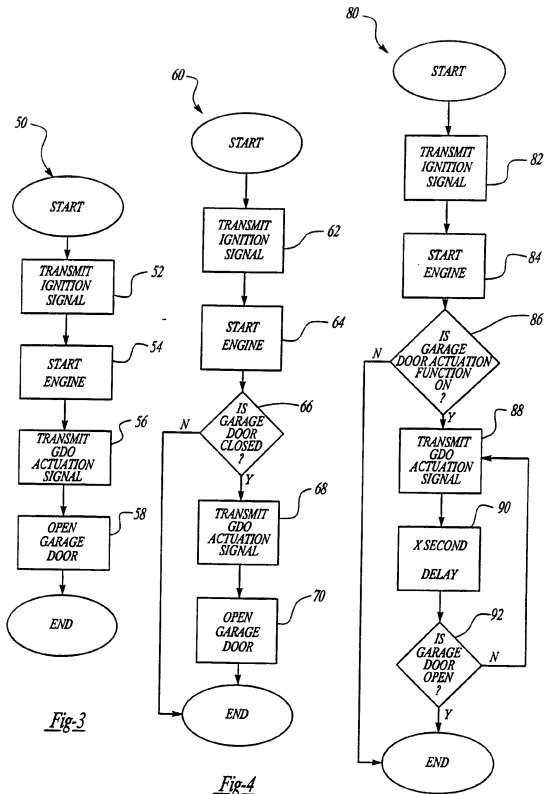

# INTERNATIONAL SEARCH REPORT

Internat'l Application No.  
PCT/US 99/12871

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 B60R25/04 E05B49/00 E05F15/20 F02N11/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B60R E05B E05F F02N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 195 28 099 A (MARQUARDT GMBH) 6 February 1997 (1997-02-06)	1,5,7
Y	column 3, line 32 - column 4, line 37 column 6, line 46 - line 58 column 7, line 50 - line 54 -----	6
X	US 5 129 376 A (PARMLEY DONALD D) 14 July 1992 (1992-07-14)	1,7,8; 11,12
	column 1, line 55 - column 2, line 9 column 4, line 7 - line 29	
Y	US 5 686 903 A (DYKEMA KURT A ET AL) 11 November 1997 (1997-11-11)	6
	column 4, line 18 - line 44 -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "Z" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

3 November 1999

10/11/1999

Name and mailing address of the ISA  
European Patent Office, P.B. 5518 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Areal Calama, A-A

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.  
PCT/US 99/12871

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19528099 A	06-02-1997	NONE	
US 5129376 A	14-07-1992	NONE	
US 5686903 A	11-11-1997	CA 2174884 A DE 19619715 A GB 2301961 A JP 9036773 A	20-11-1996 21-11-1996 18-12-1996 07-02-1997